

LV-7575

MULTIMEDIA PROJECTOR

Canon

Delighting You Always



Pure Power Projection

5,500 LUMENS

STATE-OF-THE-ART
10-BIT PROCESSING

NATIVE XGA RESOLUTION

HDCP COMPATIBILITY

4 INTERCHANGEABLE LENSES

Canon's new flagship LV-7575 is nothing less than outstanding. Packed with 5,500 lumens and advanced 10 bit processing, experience ultra-bright, clear projection in any situations. Designed for superb performance, the LV-7575 has the flexibility to select up to 4 interchangeable lenses for optimal projection.

Ease-of-use and flexible placement makes the LV-7575 an ideal choice for large venues such as cinemas and auditoriums. Armed with a DVI-D interface that supports HDCP, the LV-7575 further expands its compatibility to the latest High Definition content such as HDTV.

LV-7575 OPTIONAL LENSES & ACCESSORIES



LV-IL01 - Ultra Wide Angle Lens
Focal length: 22.33 mm



LV-IL02 - Wide Angle Zoom Lens
Focal length: 34.3 - 48.02 mm



LV-IL03 - Long Focus Zoom Lens
Focal length: 63.5 - 111.5 mm



LV-IL04 - Ultra Long Focus Zoom Lens
Focal length: 111.6 - 155.2 mm



LV-NI02 - Network Imager
Operate the projector and transmit images over a network

Canon

SOUTH & SOUTHEAST ASIA
REGIONAL HEADQUARTERS

Canon Singapore Pte. Ltd.
1 HarbourFront Avenue
#04-01 Keppel Bay Tower
Singapore 098632

Tel: 65-67998888
Fax: 65-62217577

www.canon-asia.com

Outstanding Brightness & Clarity




Lower brightness, 8-bit processing | 5500 lumens, 10-bit processing for 1.07 billions possible colours

Shining bright at 5500 lumens, the LV-7575 is Canon's brightest and most powerful projector. Equipped with state-of-the-art 10-bit processing circuitry, images with smoother gradations and natural, faithful colour renditions are guaranteed. Combined with 3-D Digital Noise Reduction and Intelligent Sharpness Control, the LV-7575 delivers clear high-quality images even in well-lit environments.

Flexible Projector Placement

Designed for flexible placement, the LV-7575 can be mounted either on the floor or on the ceiling. Powered lens-shift mechanism ensures expanded height options while the ability to interchange between 4 optional lenses provide a greater choice over projection distances. The Keystone Correction functions with a maximum of $\pm 35^\circ$ vertical and $\pm 15^\circ$ horizontal adjustment ensures distortion-free projection.

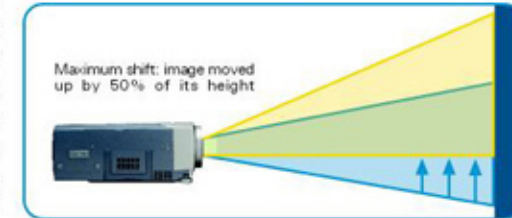

Versatile Image Settings



Custom Mode: Source Image | Custom Mode: Gamma Increased

To achieve the best results with different types of input, 4 projection modes (Standard, High Contrast, Cinema and Custom) are available for selection. The LV-7575's Colour Tone Processing function also allows further fine-tuning of the hue, chroma and gamma curve. Or switch to Auto Picture Control mode and let the projector automatically adjust the optimum image brightness.

Wide Range of Interfaces & Compatibility

The LV-7575 features advanced interfaces such as DVI and Component input for high-speed, high quality projection. Support for HDCP (High-bandwidth Digital Content Protection) allows playback of HDCP digital videos. 5BNC interface offers long cable connection without deterioration in image quality. Programming the LV-7575's operating schedule; switching input mode, transfer of images and other tasks can be performed remotely with the optional Network Imager.



Unauthorised Usage Protection

For safeguarding information, the LV-7575 has a host of security functions installed for maximum protection. A PIN Code Lock function allows users to enter a pin code to protect the projector from unauthorised usage.

Specifications

Display Panel	1.3" LCD TFT Active Matrix
Number of Pixels	1024 x 768 (XGA)
Brightness (lumens)	5500/4200 (silent) lumens
Contrast Ratio	800:1
Projection Lens	1.3x Motorized Zoom & Focus F1.8 - 2.1; f=48.4 - 62.8mm
Light Source	318W UHP Lamp
Brightness Uniformity	90%
Projection Image Size (Throw Distance)	31" ~ 400" (1.4m ~ 14.7m)
For 100" Screen Size	3.6m ~ 4.7m
Colour System	PAL/SECAM/NTSC/NTSC4.43/PAL-M/PAL-N
HDTV (Digital)	1080i/1035i/720p/575p/575i/480p/480i
Speakers	2 speakers: 2W + 2W Stereo
Digital Keystone Correction	± 35 degrees up/down ± 15 degrees right/left
Power Consumption	480W
Dimension (WxHxD)	318x168x430mm
Weight	8.7kg

Kit Content

- Owner's Manual
- AC Power Cord
- Remote Control with Laser Pointer
- Batteries
- VGA Cable
- USB Cable
- Mouse Control Cable
- Protective Dust Cover
- Lens Cover
- Lens Attachment

